

IBM ThinkCentre M51 (8141) BIOS 程式升級手冊

本手冊介紹 IBM 桌上型電腦M51-BIOS 如何升級

底下所有內容，僅適用於下列數款IBM桌上型電腦
ThinkCentre M51 (Machine-Type: **8141**, 8142,
8143, 8144, 8145, 8146)

步驟一：請使用瀏覽器，連結至下列 IBM 台灣網站。

<http://www-306.ibm.com/pc/support/site.wss/document.do?Indocid=MIGR-55824>

IBM Personal computing support - Flash BIOS update - ThinkCentre A51, A51p, M51, S51

檔案(F) 編輯(E) 檢視(V) 我的最愛(A) 工具(T) 說明(H)

網址(D) <http://www-306.ibm.com/pc/support/site.wss/document.do?Indocid=MIGR-55824> 移至

Country / region [select] | English

Home | Products | Services & solutions | Support & downloads | My account

Flash BIOS update - ThinkCentre A51, A51p, M51, S51

Personal computing support

Downloads and drivers

Troubleshooting

Hints and tips

Parts information

Publications

Product information

Operating system installation

Important information

Submit a request

Warranty

Site help

Site feedback

Search PC support

Related links

- Accessories and upgrades
- Business Partner support
- IBM PC Institute
- IBM Publications Center

↓ Applicable countries and regions

This package updates the basic input/output system (BIOS) on IBM ThinkCentre 8141, 8142, 8143, 8144, 8145, 8146, 8171, 8172, 8173, 8421, 8422, 8423, 8424, 8425, 8426, 8427, 8428 systems.

BIOS is programming that controls low-level hardware operations, including interactions with diskette drives, hard disk drives, and the keyboard. The BIOS is stored on a chip. Your computer uses flash BIOS, which can be updated through a program on a flash diskette so that you do not have to replace the BIOS chip to update the BIOS.

Note: Make note of any settings you have changed in the BIOS Configuration Utility. These settings may have to be re-entered after updating the BIOS.

Print this file so that you can refer to it during the installation.

File details

Version:	2BKT37A
Release Date:	2004/11/04

File link	File size	File description
2bit37a.exe	863,347	Flash BIOS update (bootable diskette version)
2bit37a.txt	8,338	Installation instructions for flash BIOS update

網際網路

步驟二：請找到 Flash BIOS update (Flash from operating system version) , 並請點選「2bjy37usa.exe」, 準備下載BIOS程式。

The screenshot shows the IBM Personal computing support website for a Flash BIOS update. The page title is "Flash BIOS update - ThinkCentre A51, A51p, M51, S51". The browser address bar shows the URL: <http://www-306.ibm.com/pc/support/site.wss/document.do?lnocid=MIGR-55824>. The page content includes a navigation menu on the left, a main heading "Flash BIOS update - ThinkCentre A51, A51p, M51, S51", and a table of file details. A red arrow points to the file "2bjy37usa.exe" in the table, which is highlighted with a red box. The text "請點選這裡" (Please click here) is written in red above the arrow.

Flash BIOS update - ThinkCentre A51, A51p, M51, S51

↓ Applicable countries and regions

This package updates the basic input/output system (BIOS) on IBM ThinkCentre 8141, 8142, 8143, 8144, 8145, 8146, 8171, 8172, 8173, 8420, 8421, 8422, 8423, 8424, 8425, 8426, 8427, 8428 systems.

BIOS is programming that controls low-level hardware operations, including interactions with diskette drives, hard disk drives, and the keyboard. The BIOS is stored on a chip. Your computer uses flash BIOS, which can be updated through a program on a flash diskette so that you do not have to replace the BIOS chip to update the BIOS.

Note: Make note of any settings you have changed in the BIOS. Settings may have to be re-entered after update.

請點選這裡

Print this file so that you can refer to it during the installation.

File details

Version:	2BKT37A	
Release Date:	2004/11/04	
File link	File size	File description
2bit37a.exe	863,347	Flash BIOS update (bootable diskette version)
2bit37a.txt	8,338	Installation instructions for flash BIOS update (bootable diskette version)
2bjy37usa.exe	1,815,946	Flash BIOS update (Flash from operating system version)

步驟三：出現下列的新視窗「Terms and conditions」。

步驟三之一：請先用滑鼠取消「Use IBM Download Director」的左方選取方塊。


步驟三之二：再用滑鼠點選「I agree」方塊左方的箭頭符號。




步驟四：出現下列視窗「檔案下載」，並請點選「儲存」。




步驟五：出現「另存新檔」視窗時，請將檔案儲存在C:\ 底下，
檔案儲存名稱為：2bjy37usa.exe，之後請按下「儲存」按鈕。

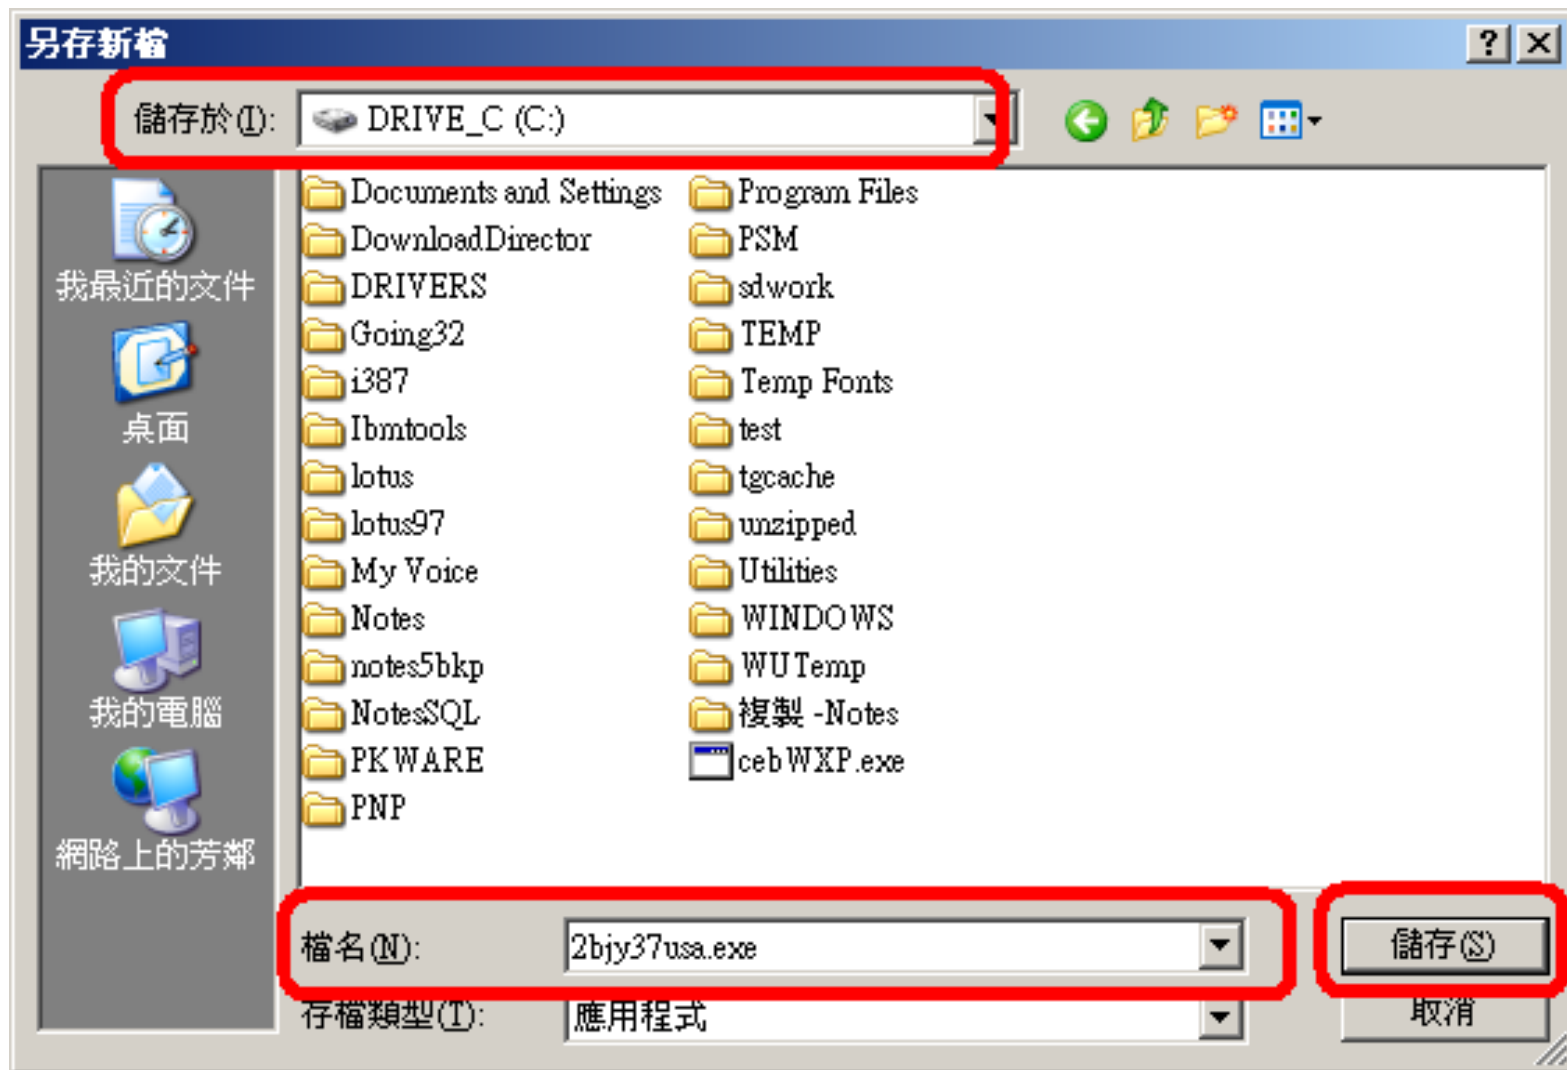


步驟六：打開電腦的「Windows檔案總管」，並請執行C:\2bjy37usa.exe。

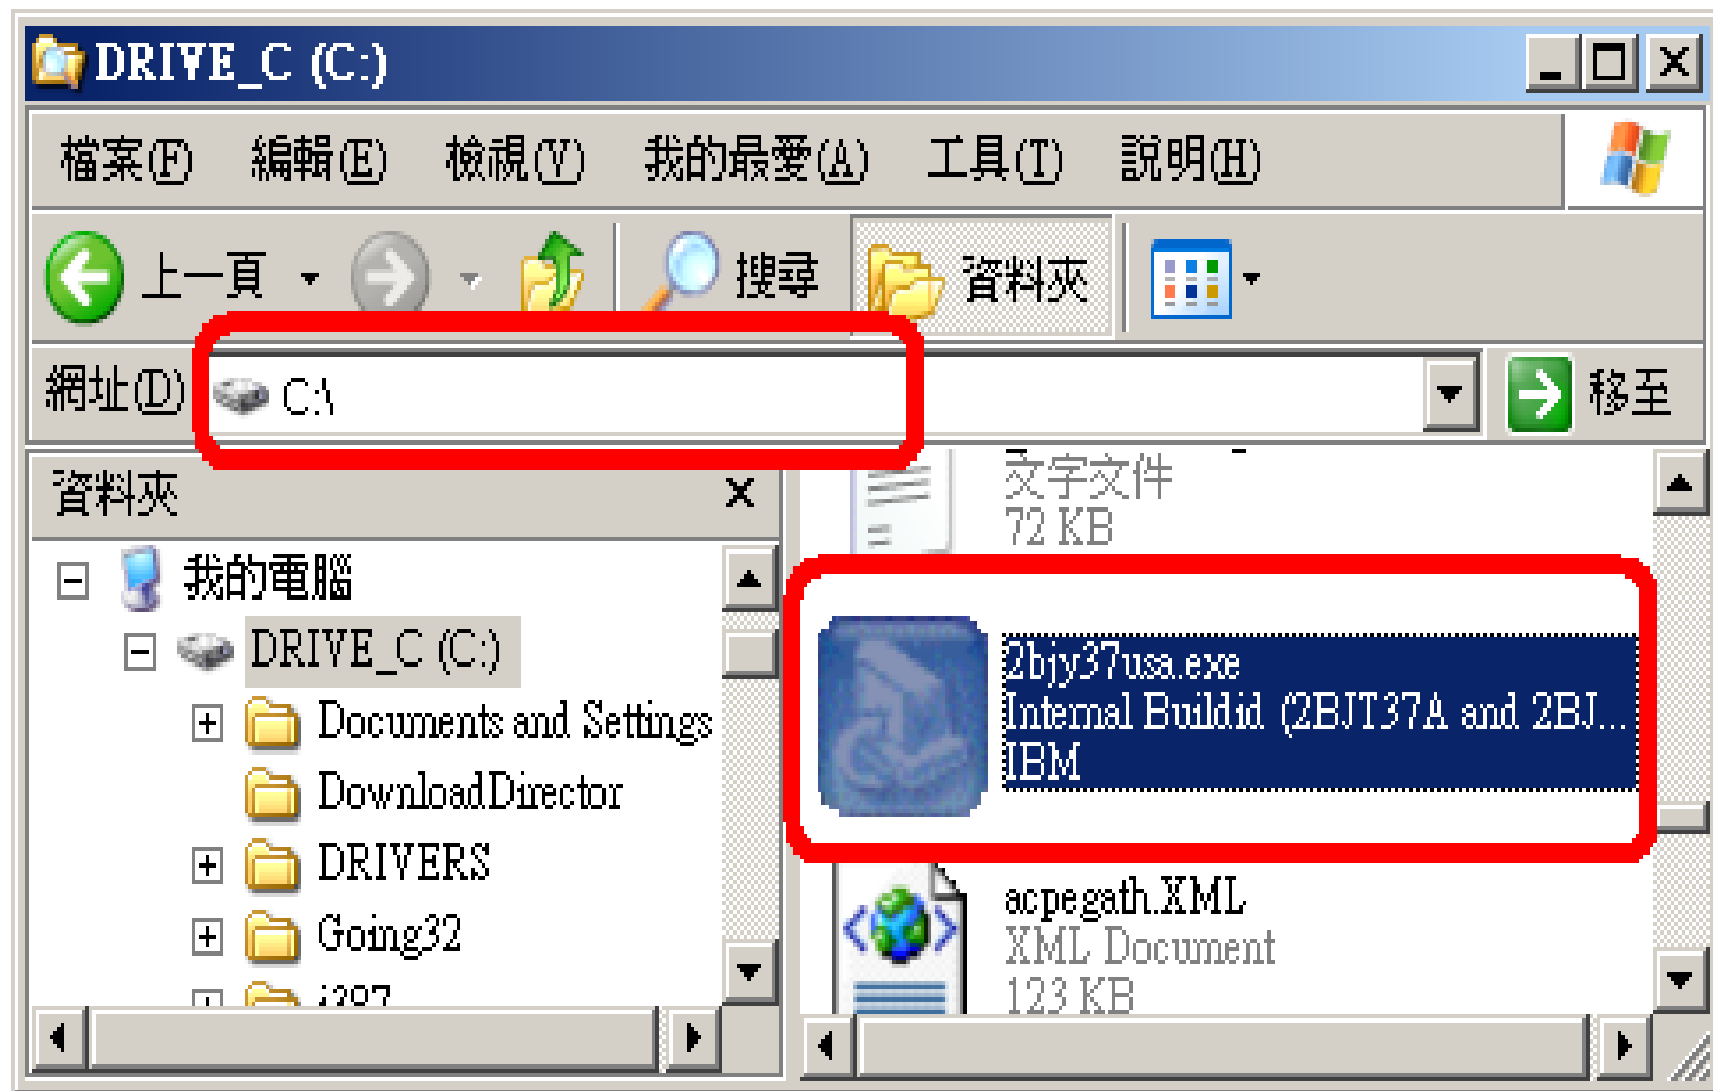


步驟七：出現下列視窗，並請點選「Next」。

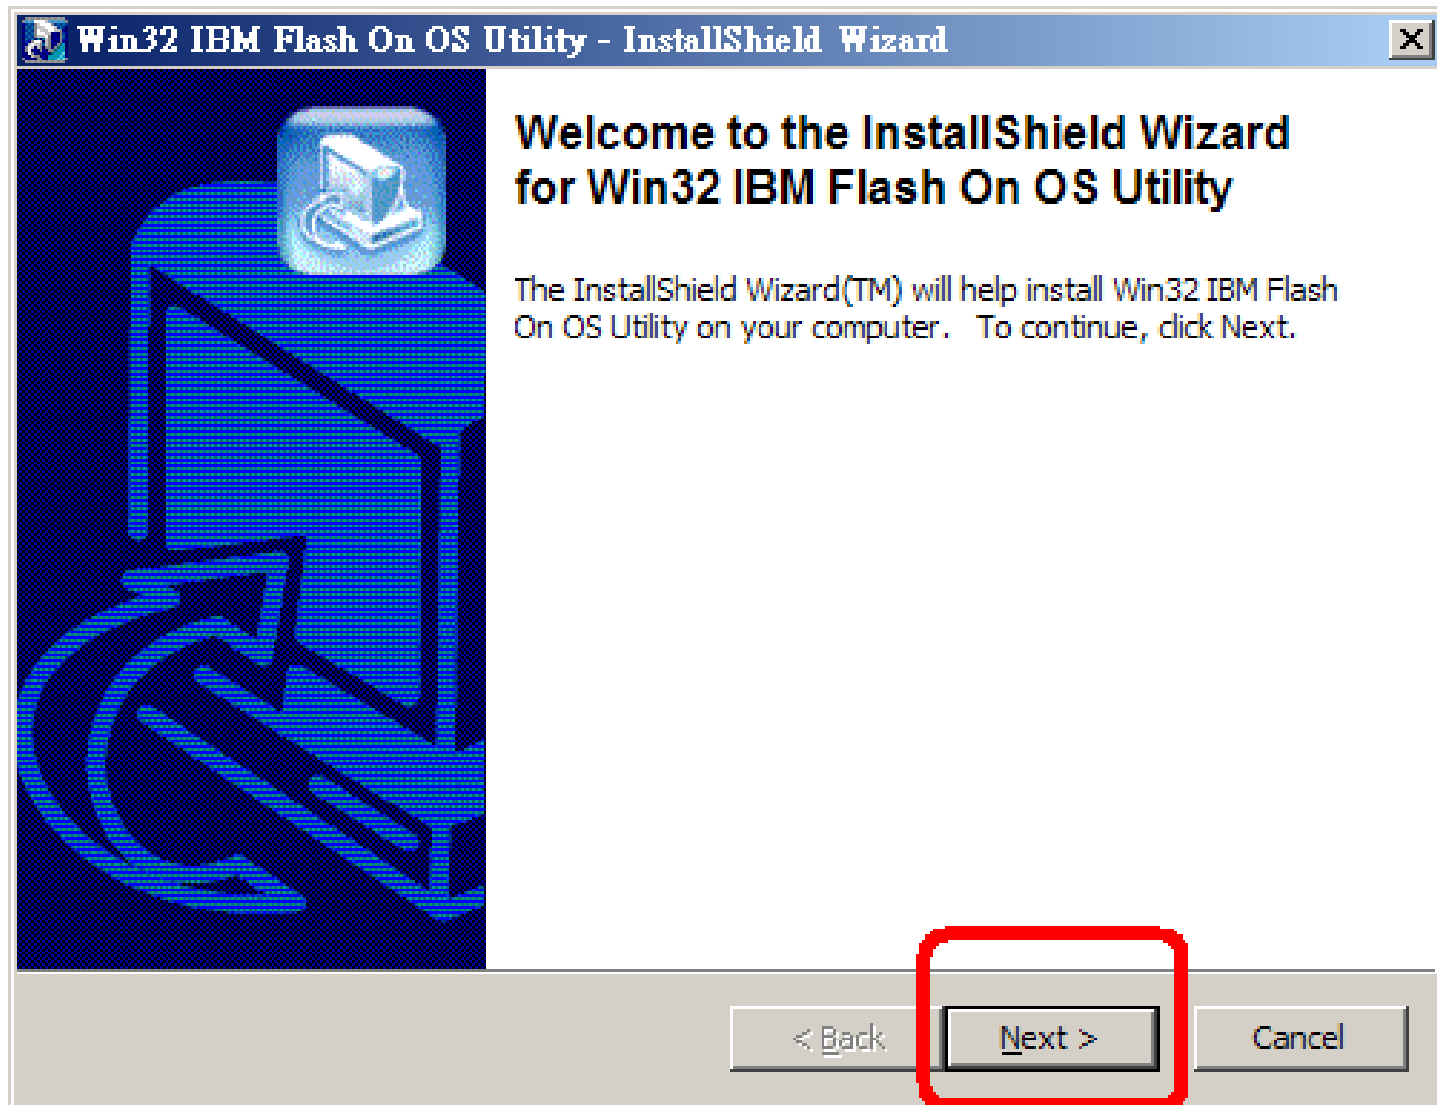


步驟八：出現下列視窗，並請點選「I accept the terms」，之後請點選「Next」。

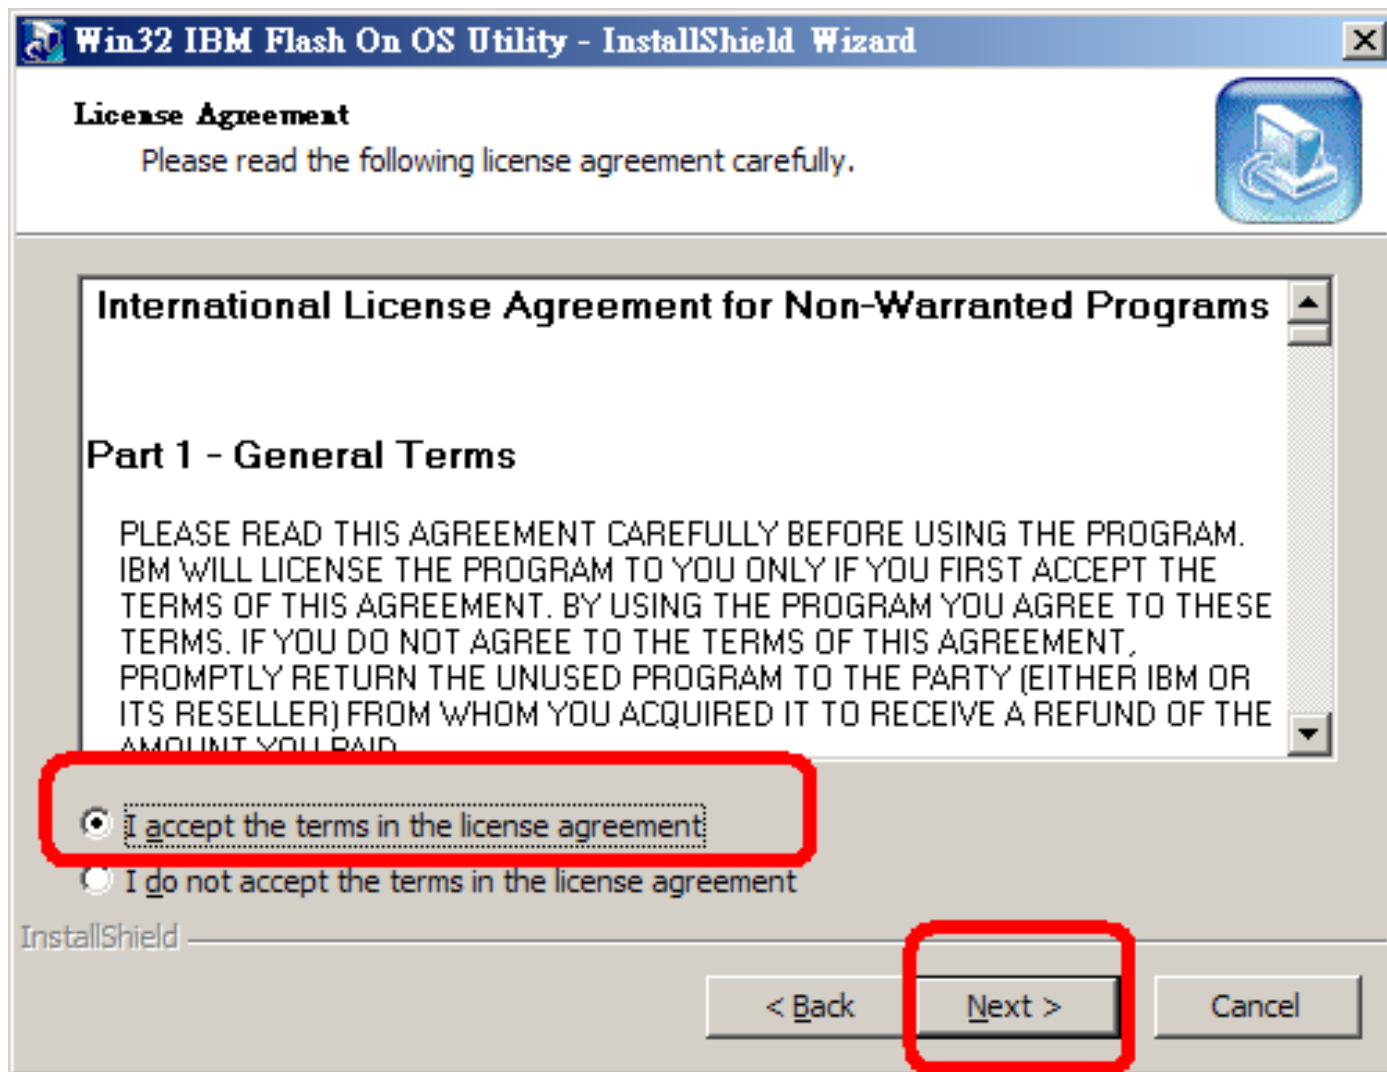

步驟九：出現下列視窗，並請點選「Next」。

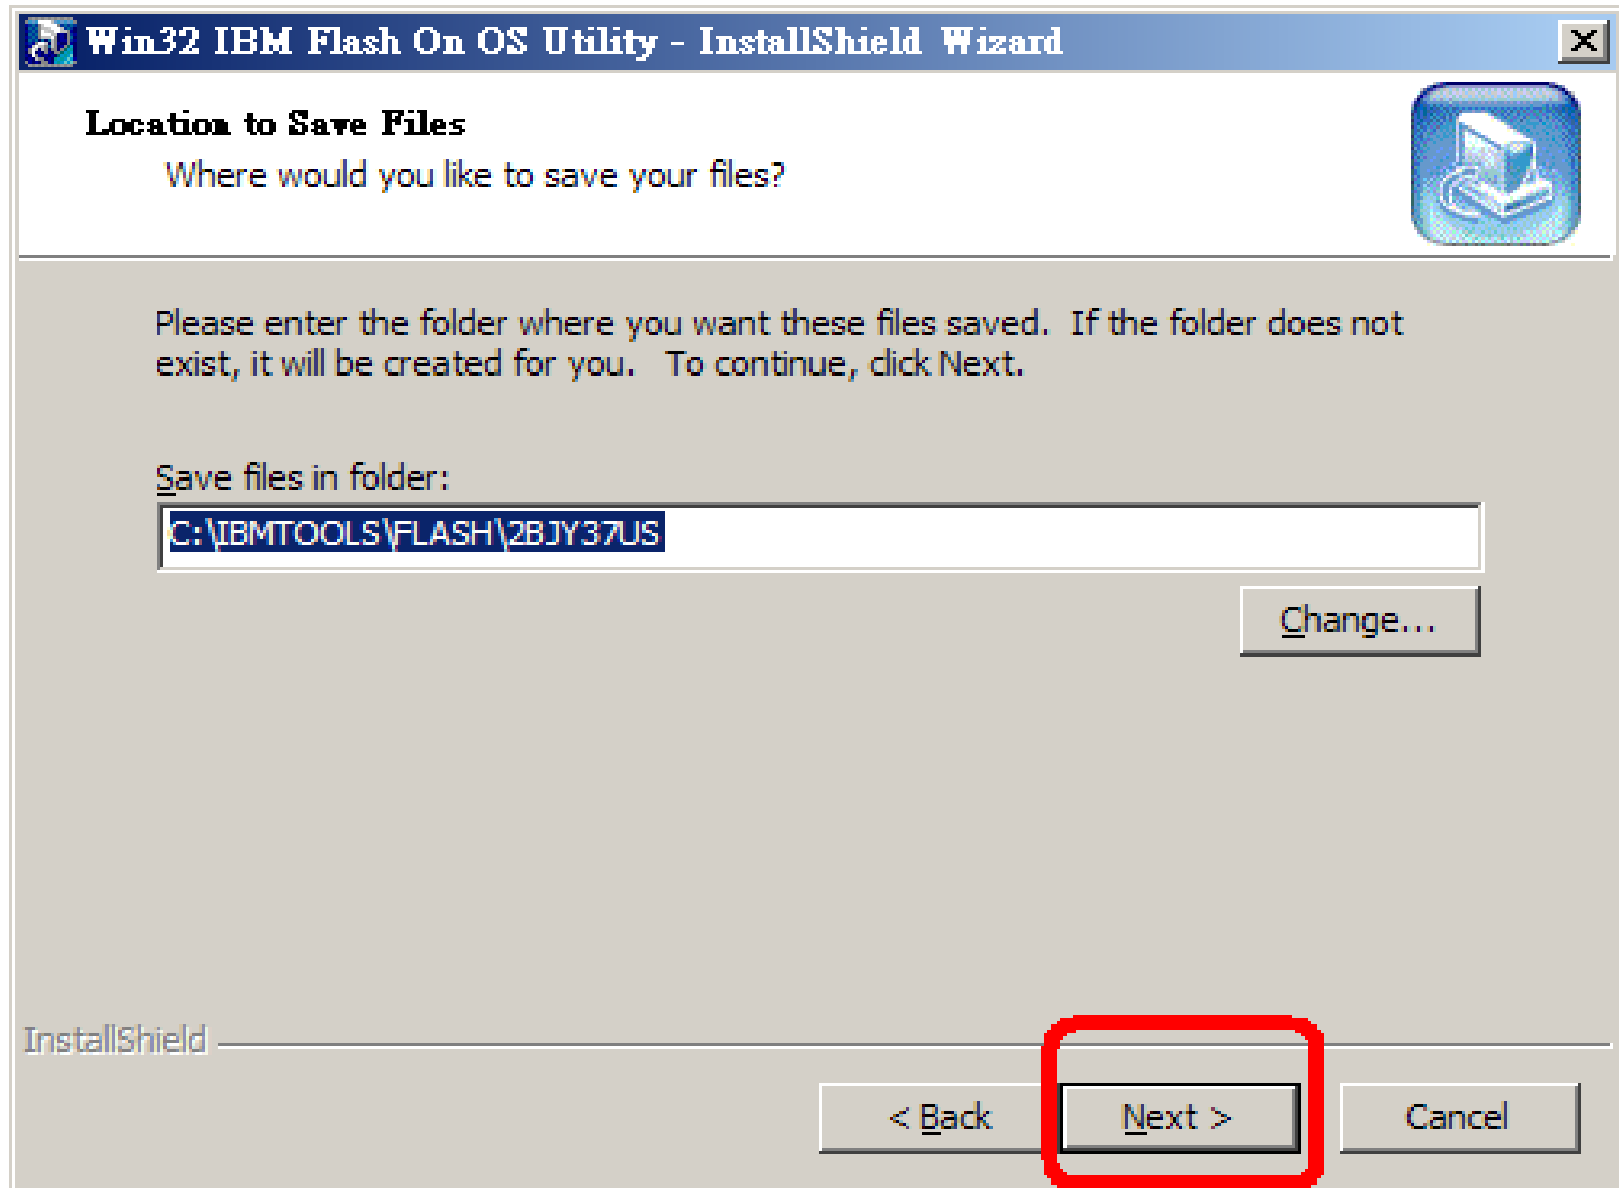


步驟十：等待出現下列視窗，並請點選「Finish」。

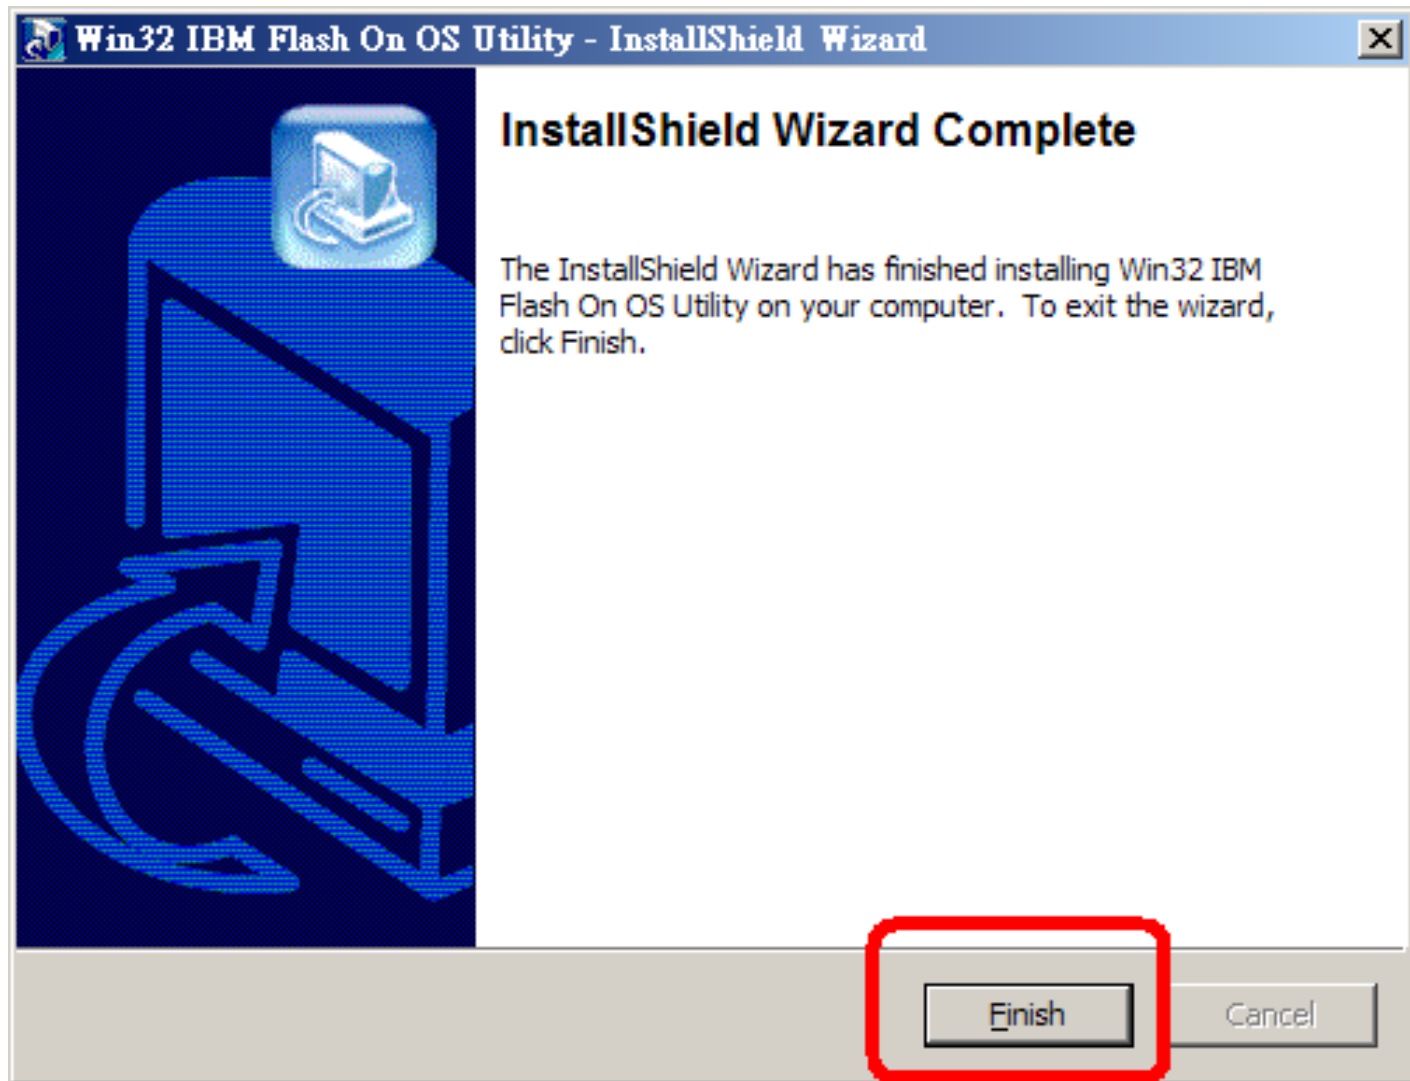

步驟十一：打開電腦的「Windows檔案總管」，並請執行下列程式：
C:\IBMTOOLS\FLASH\2BJY37US\WINPHLASH.EXE



步驟十二：出現下列視窗，並請點選「Flash BIOS」

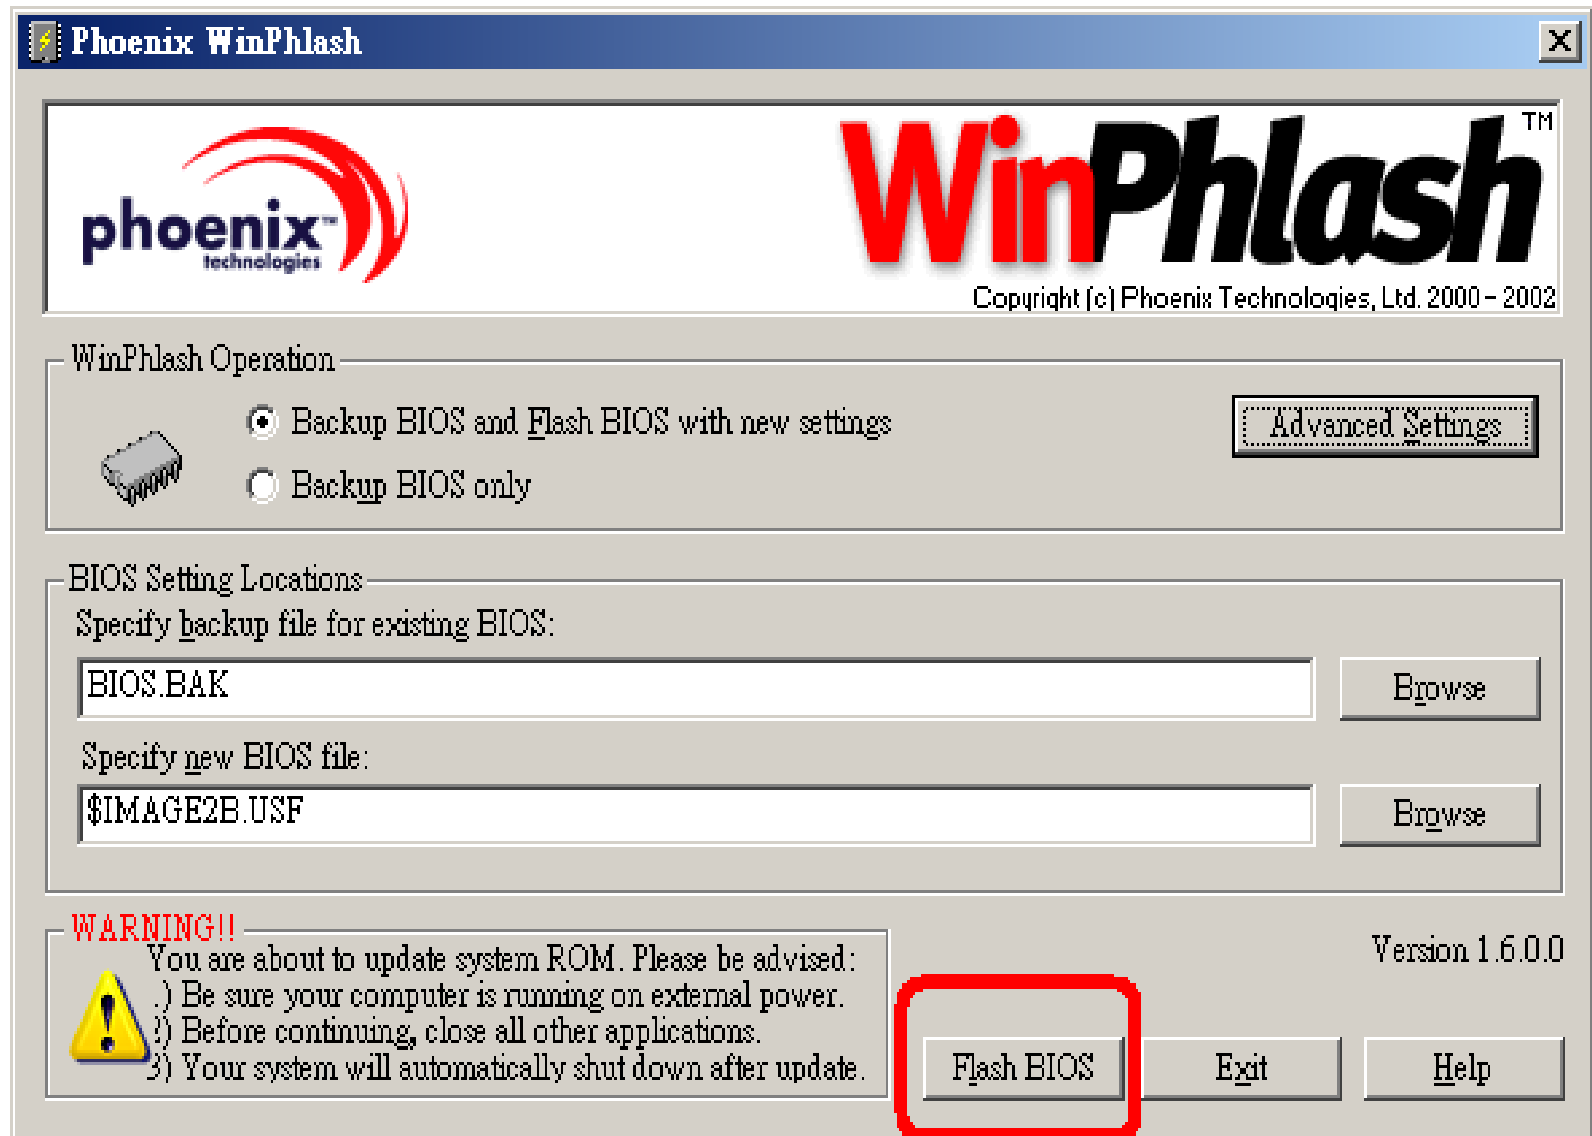

步驟十三：出現下列警告訊息視窗，請確認下列三件事情之後，再點選「確定」。

- (1) 請確定電腦是用外接電源。
- (2) 在進行下一步驟之前，請儲存尚未存檔的資料，並關閉所有其他應用程式。
- (3) 當BIOS更新完畢之後，本台電腦將會自動關機。

請客戶確認上述三個敘述，並確實執行之後，按下「確定」按鈕，開始進行BIOS更新

